


Best Flyscreens

Ascena 1

Fly screen

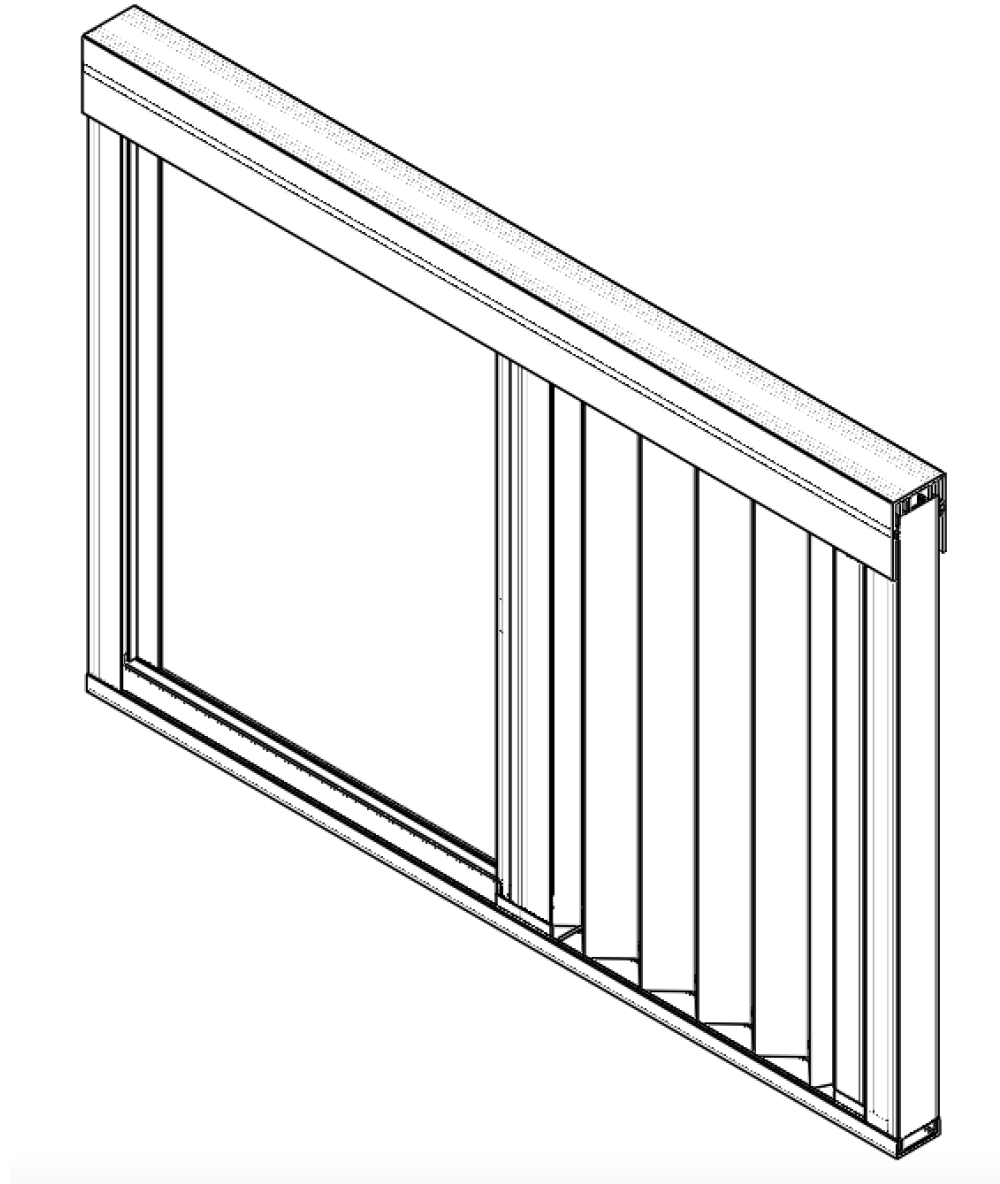

Tools Required




6' Level




Suitable fixings to fix frame and jambs of screen to floor/walls




Drill



Screw drivers

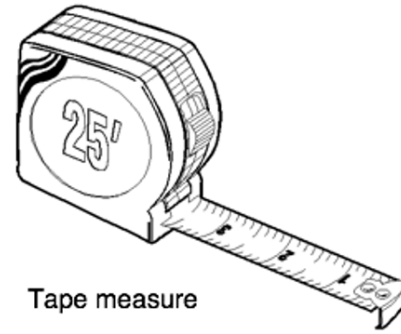

Tape measure




Suitable drill bits



Multi tool recommended for cutting skirting board















Suitable sealant and caulk gun





countersink

Supplied parts




Fitted Parts Identification

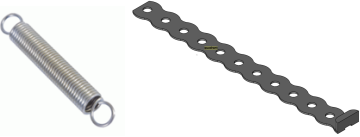Part Codes/ description		Part Codes/ description	
SC005 Screen moulding		SC006 Frame string guide	
SC007 Mesh Guiding string		SC008 String bush	
SC009 Machine M4 Guide screw		SC011 Fly screen mesh	
SC020 & SC010 Spring tension plate String tension spring		SC012 Mesh retaining plate 3/4" X 1/16"	
SC013 Jamb magnet		SC014 Screen magnet	
SC021 Cover strip joiner		SC022 Double Handle Screen Jamb	


Loose Parts Identification

Part Codes/ description		Qty	Location
SC004 4mm Cover strip		1	In your frame pack
SC017 3.9 X 38mm self-drilling screw		1	In your frame pack


Check delivery

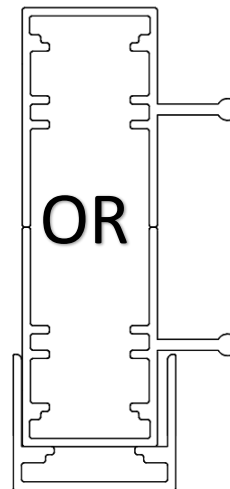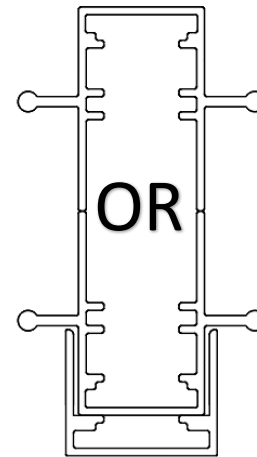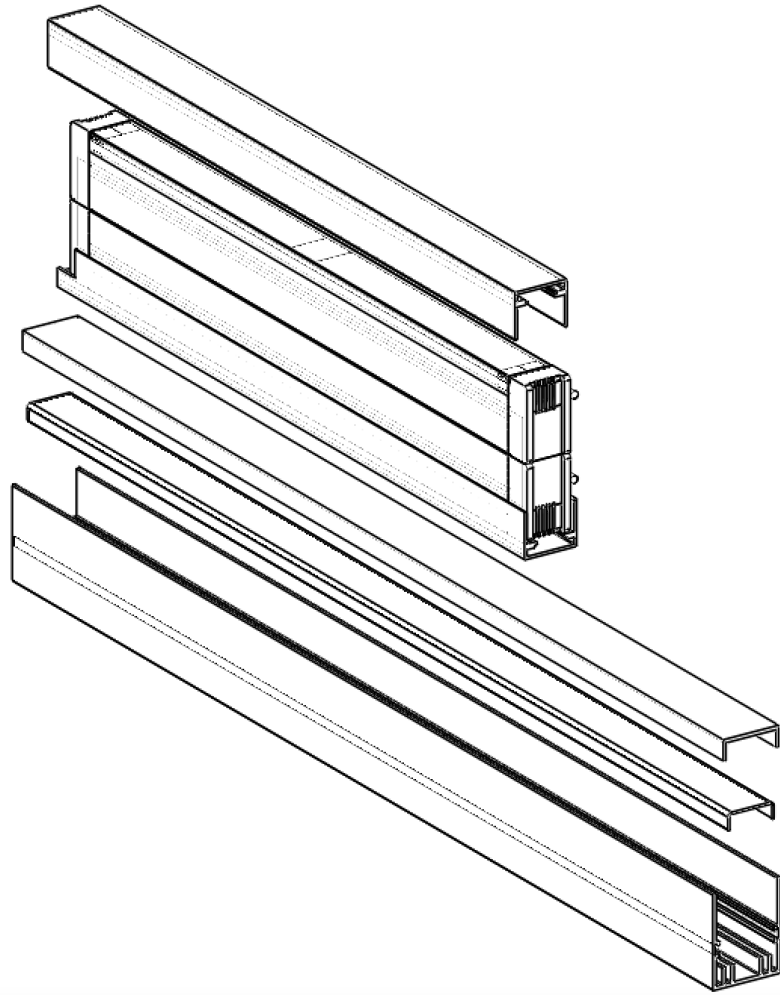

X 1
X 1
X 1
X 1
X 1

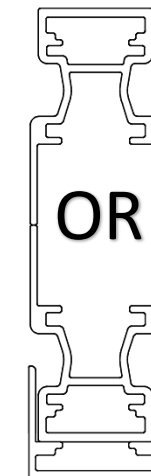

Fitting / Installation Instructions – (for a left side gathered screen)

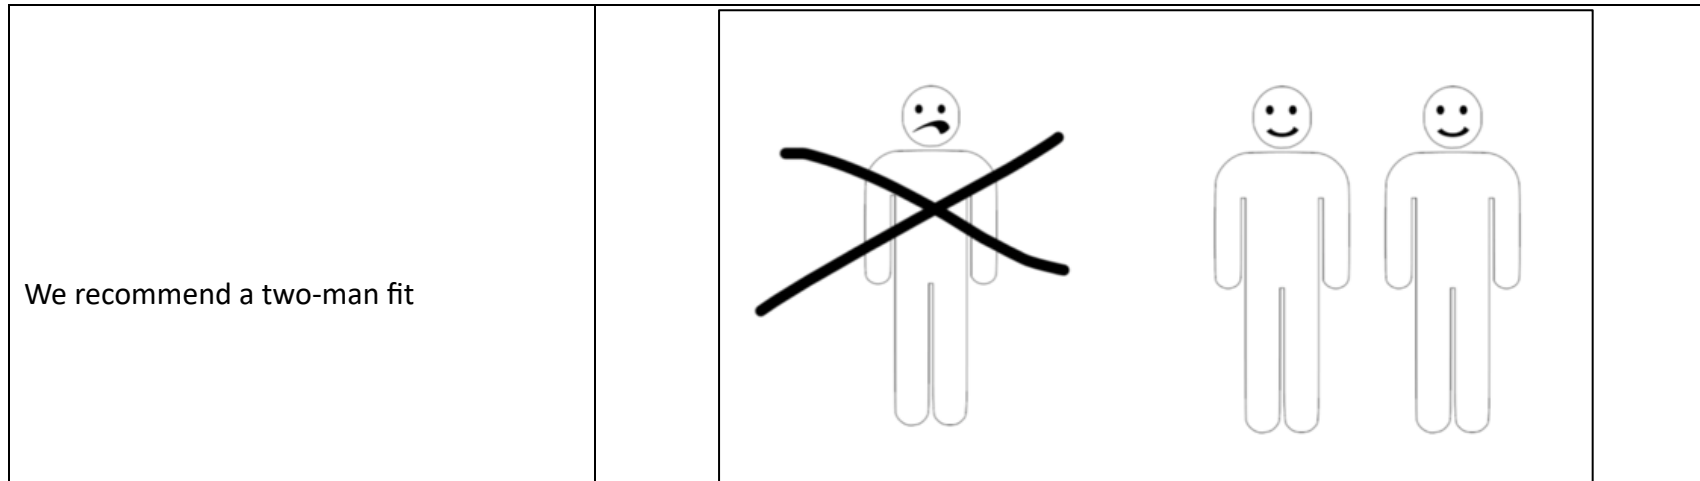

Installation Notes


When fitting screen tight to a standard door it will not be possible to operate the screen while the door is closed. This will be due to the door handle protruding into the area in which that the screen will pass across.

If Trickle vents are fitted to the top of the door and you are planning to fit the screen tight against it. Measure size to fit under the vents by at least 20mm to allow for air flow and operation. A clean line result would be achieved if the bottom of the screen top track is flush with the bottom of the door top track.

A 100mm spacing from the face of the door gives 70mm gap between the screen and door for the handle to rest if desired

A small section of Skirting board on each side of the opening may need to be removed, if you wish the screen to fit flush to the wall (Recommended).

Parts identification

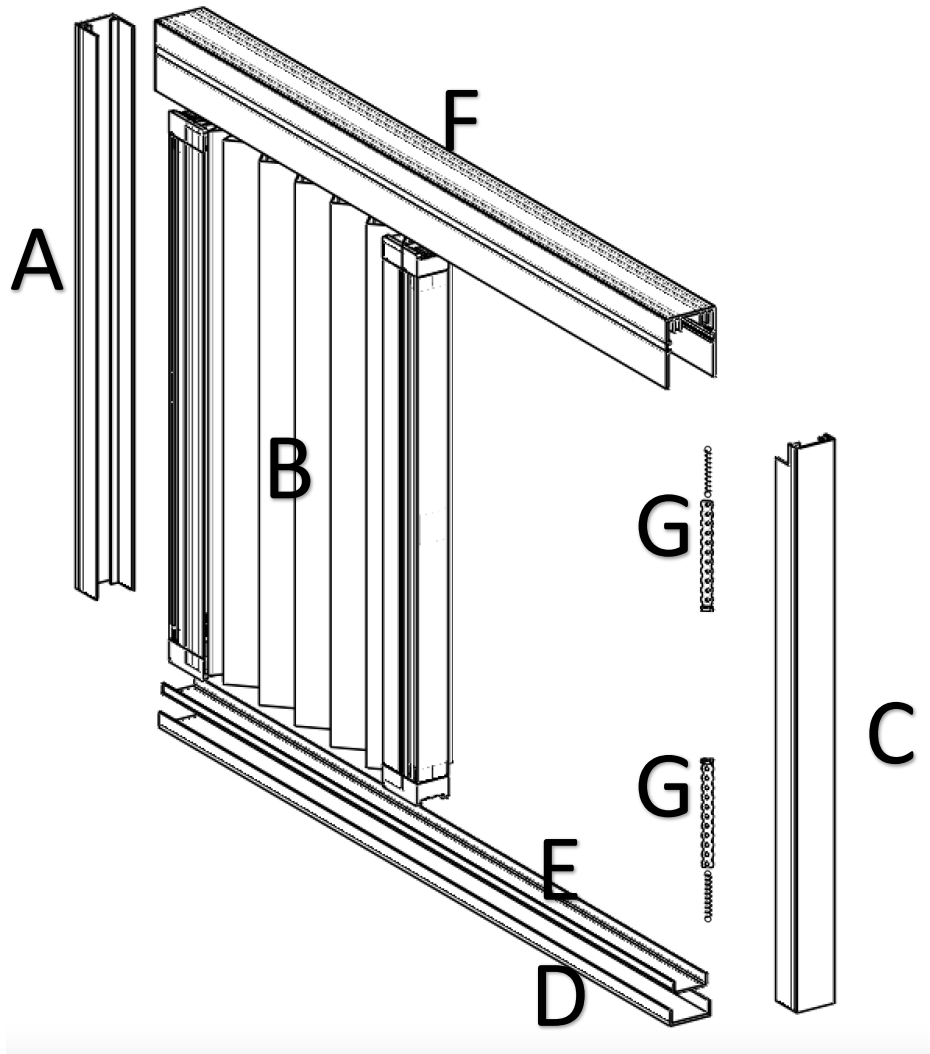

A = Gathered side frame jamb

B = Mesh cartridge

C = Off side frame jamb part of cartridge B

D = Aluminium Low bottom track


E = PVC track insert

F = Top track


G = Spring tensioner part of cartridge B

Fit bottom track D into place making sure to check the screen is parallel to desired door and level all the way across supported at 500mm intervals if required (2) *(It is recommended that this is done with a laser level (1) for best results).*

Fix to floor with appropriate fixing screws and fit pvc cover E *(Recommended)*

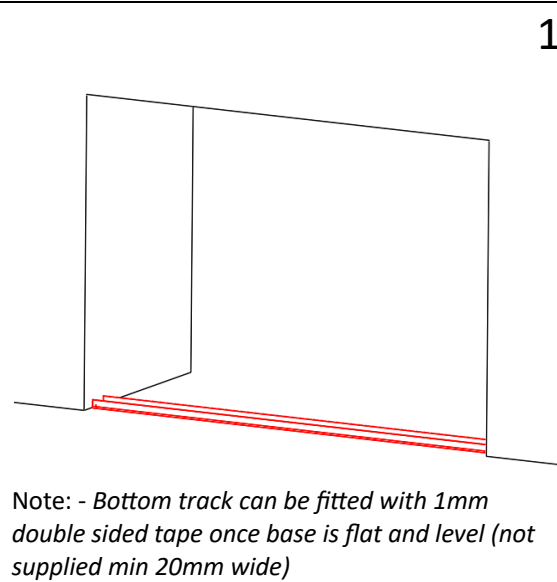


Place frame jamb A on the side which you wish for the screen to open back onto (gathered end). Check that you have 15-18mm above the jamb to be able to fit the top track. Level jamb and fix to wall with appropriate fixing screws

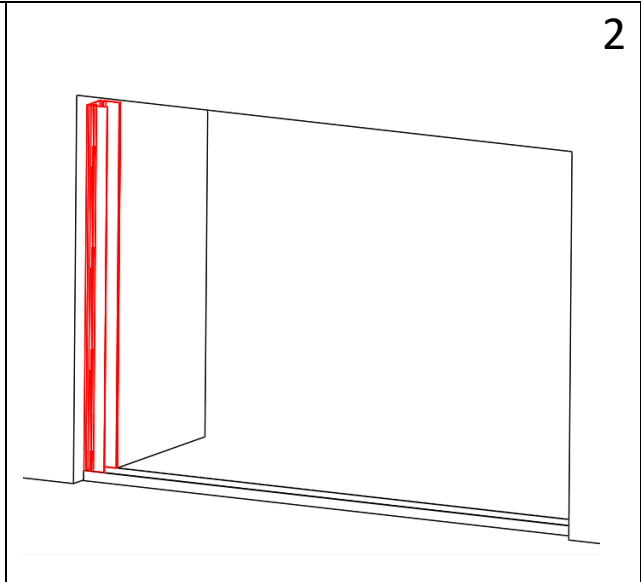


Place the cartridge B on the floor in front of the fitted bottom track

Make sure the top is facing the fitted jamb and off side jamb C is on top then carefully unwrap strings

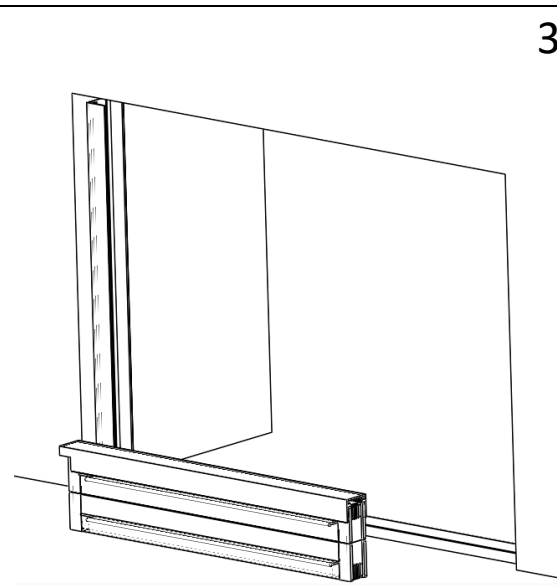


Fit top track F by slotting it above jamb A and running parallel to the bottom track

Fix to ceiling with appropriate fixing screws

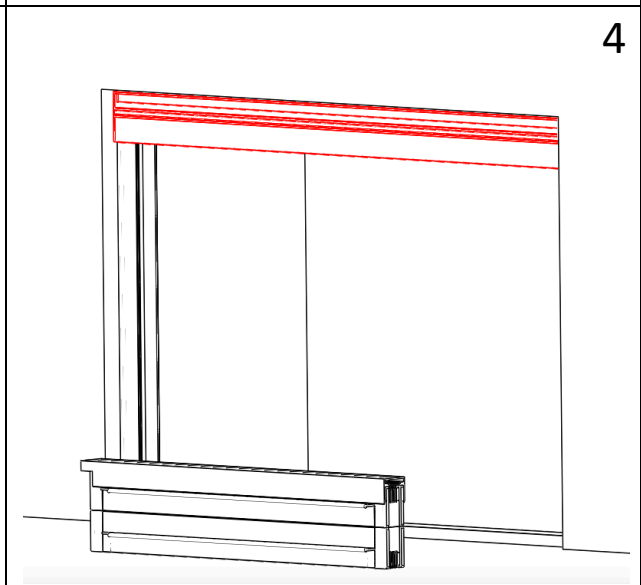


Carefully lift C off the cartridge B allowing the strings to feed through the blocks at the end as you do so and place against the wall

Fix to wall with appropriate fixing screws

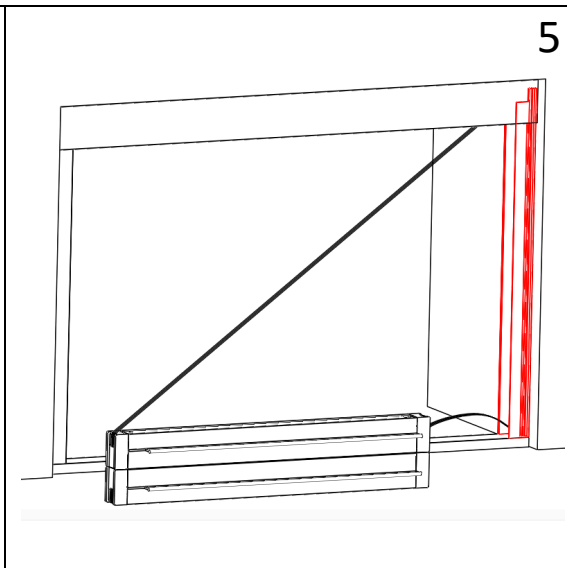


5

Lift cartridge B and insert top into top track F taking care not to tangle or cross the strings

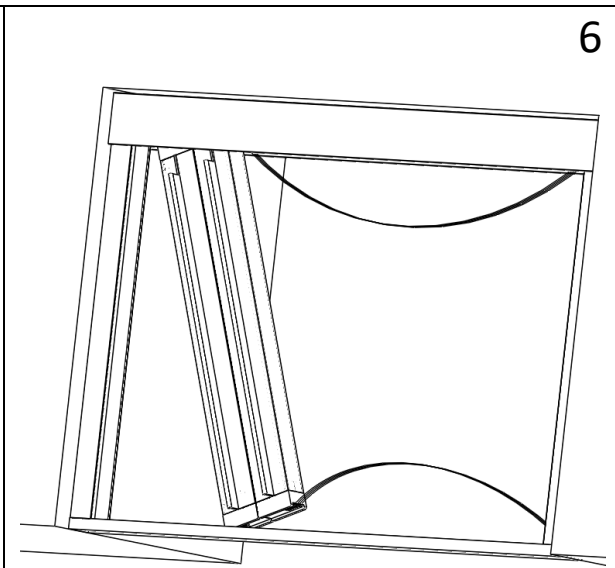

Slide cartridge flush to jamb A, it will grab the magnets holding it in place during fitting

Warning magnets will not hold under normal operation see step 10

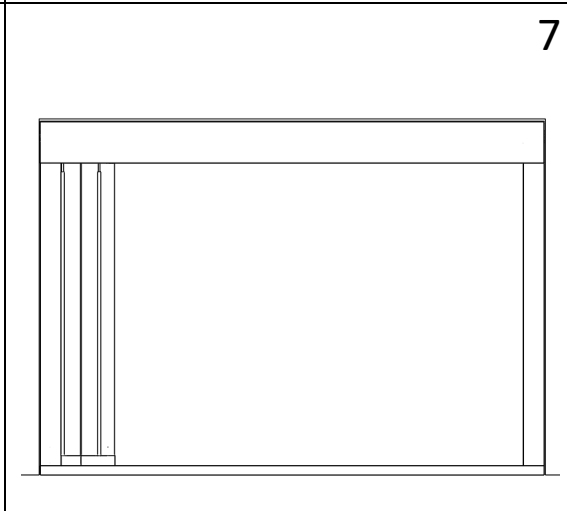


7

With someone holding the cartridge fix the spring tensioner G into place with a wall fixing.


Do this for top and bottom

Fitted length of spring approximately 85mm

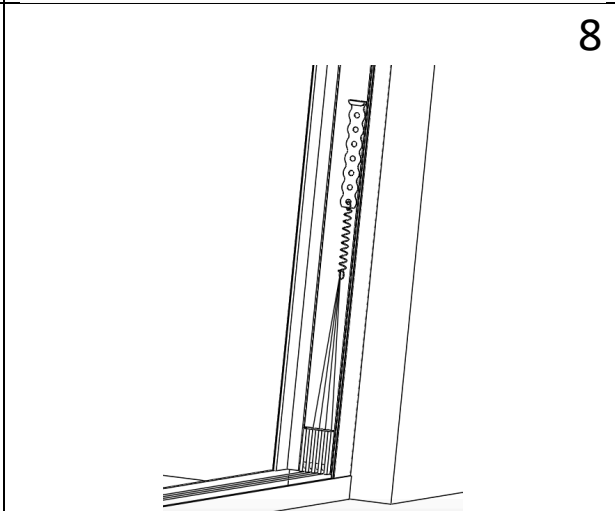


8

Test screen operation taking care that the fixed side of the screen does not come away from the magnets on jamb A

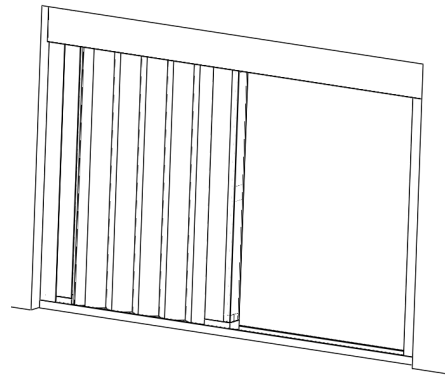


9

Once happy with the operation fix cartridge to jamb using 38mm screw provided through the centre by pulling the mesh to one side

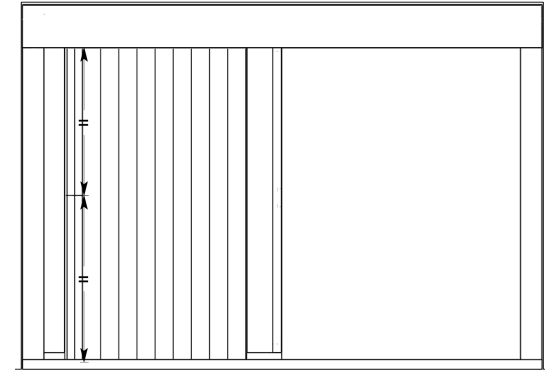


10

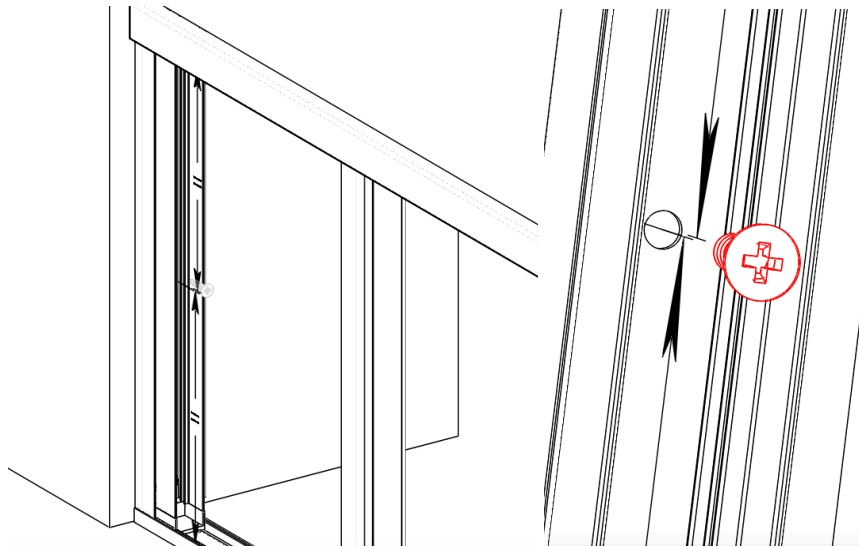

10

Fit steel cover strip over spring tensioners

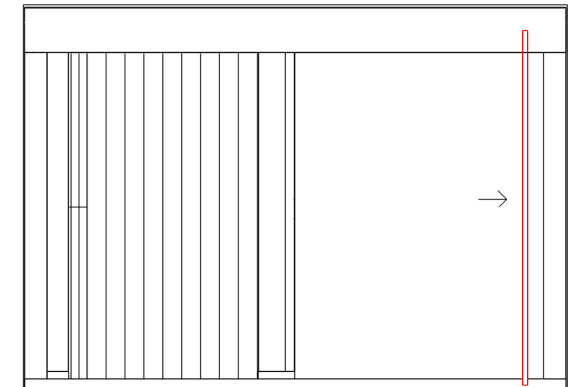

11